


LINDGREN TRAP ASSEMBLY INSTRUCTIONS

Product No. 4000200 (black) / 400020V (green)

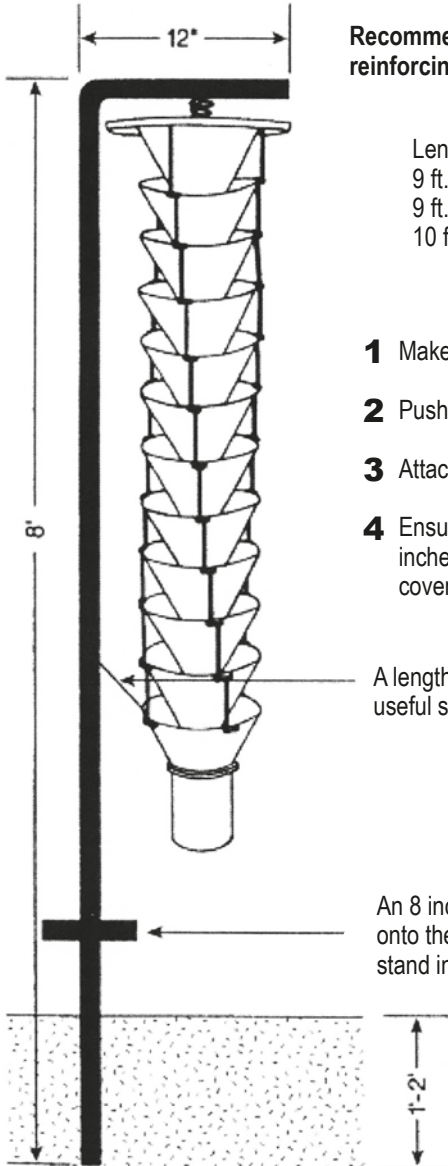

Recommended material for the stand is concrete reinforcing bar (re-bar) ½ inch to 5/8 inch diameter.

Length of re-bar:
9 ft. – 8 unit trap
9 ft. – 12 unit trap
10 ft. – 16 unit trap

- 1** Make a right angle bend at the 12 inch mark.
- 2** Push and twist the stand into the ground.
- 3** Attach hanger to stand (see over).
- 4** Ensure the bottom of the funnel is at least 12 inches above the ground and above any ground cover.

A length of wire securing the trap to the stand is a useful stabilizing device.


An 8 inch cross member of re-bar can be welded onto the stand to help push or hammer the stand into the ground.




solida.ca info@solida.ca 418-826-0900

LINDGREN TRAP ASSEMBLY INSTRUCTIONS


LINDGREN FUNNEL TRAP HANGER




Grasp the trap's white lid and feed wire hanger through the center hole. Continue to draw hanger through the hole until it extends past the collapsed funnels.



Bend the free end of the wire twice to form a Z shape. Bending the wire in the form of a Z ensures that the trap's weight does not "unbend" the wire, allowing the trap to fall.



These bends will secure the collapsed funnels to the lid, and the looped end of the hanger will serve as a convenient handle for carrying.



Hang trap on a stand (or bough), wrap the looped end of the hanger around the stand several times.